
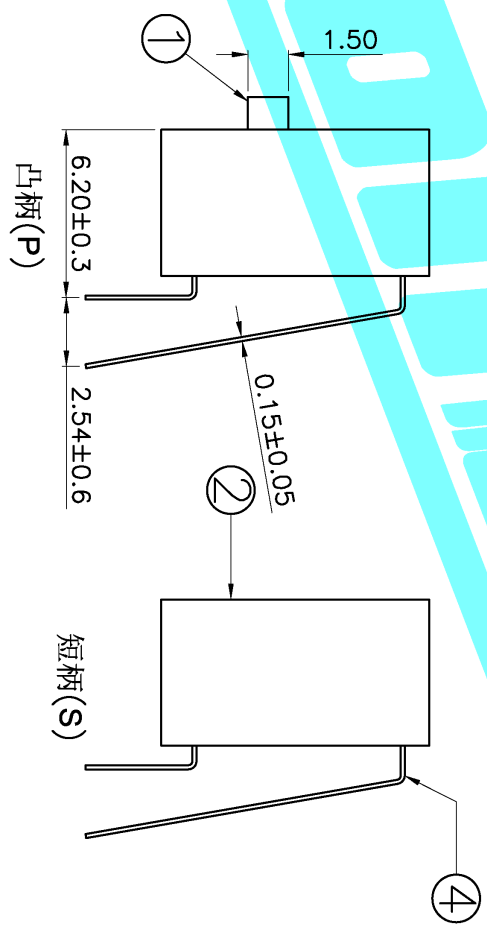
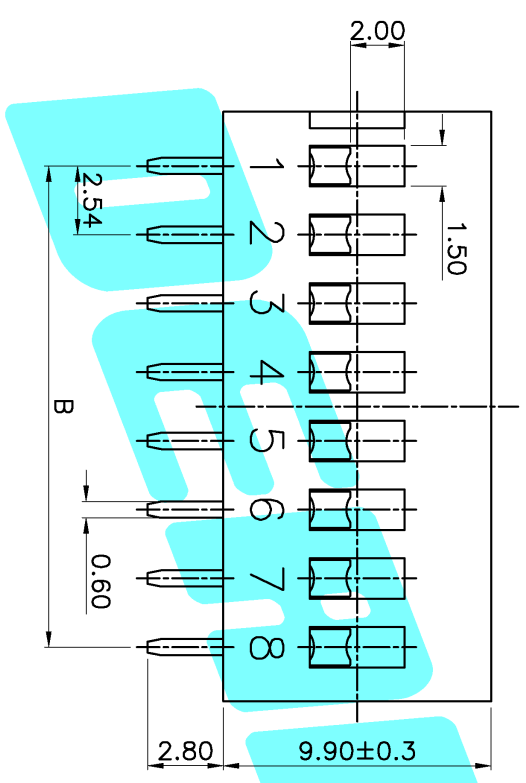
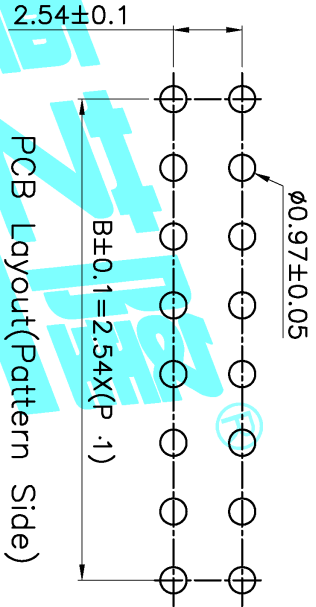



- NOTE:
1. Rating: 24V 25mA DC
  2. Contact Resistance: 50mΩ max
  3. Dielectric Strength: 500V AC/1Minute
  4. Operating Force: 1000gf Max
  5. Operating Life: 2,000 Cycles

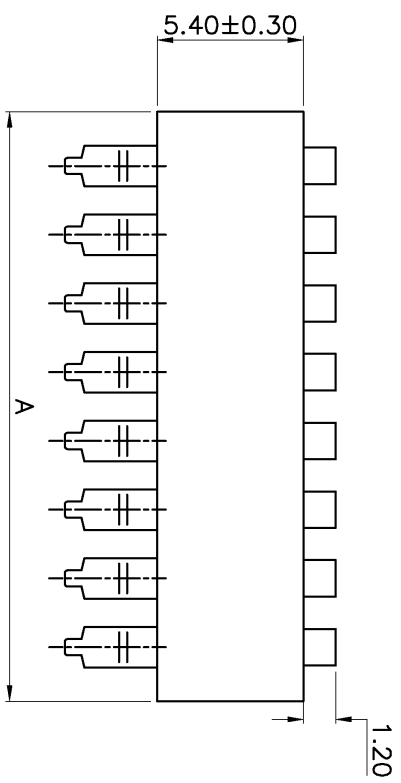

Position(位数)	2P	3P	4P	5P	6P	7P	8P	9P	10P	12P
DIM.A(长度)	6.54	9.08	11.62	14.16	16.70	19.24	21.78	24.32	26.86	31.94
DIM.B(长度)	2.54	5.08	7.62	10.16	12.70	15.24	17.78	20.32	22.86	27.94

PART NO.	凸柄(P)	凹柄(P)	凸柄(S)	凹柄(S)
DA-02RP	DA-03RP	DA-04RP	DA-05RP	DA-06RP
DA-07RP	DA-08RP	DA-09RP	DA-10RP	DA-12RP
DA-02RS	DA-03RS	DA-04RS	DA-05RS	DA-06RS
DA-07RS	DA-08RS	DA-09RS	DA-10RS	DA-12RS
DA-02BP	DA-03BP	DA-04BP	DA-05BP	DA-06BP
DA-07BP	DA-08BP	DA-09BP	DA-10BP	DA-12BP
DA-02BS	DA-03BS	DA-04BS	DA-05BS	DA-06BS
DA-07BS	DA-08BS	DA-09BS	DA-10BS	DA-12BS

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS	DATE	TOLERANCES ARE	30~以上 ±0.30	10~30 ±0.20	5~10 ±0.15	~5 ±0.10
DRAWN	G.M.Chen	2015/6/26	ANGLE	±2°	UNIT: mm	SCALE: 1:1
CHECKED			PART NO.	DA-XXXX	SHEET	1 OF 1
APPROVALS			TITLE:	DIP SWITCHES	PROJ.	
ELECTRONICS CO., LTD						

