
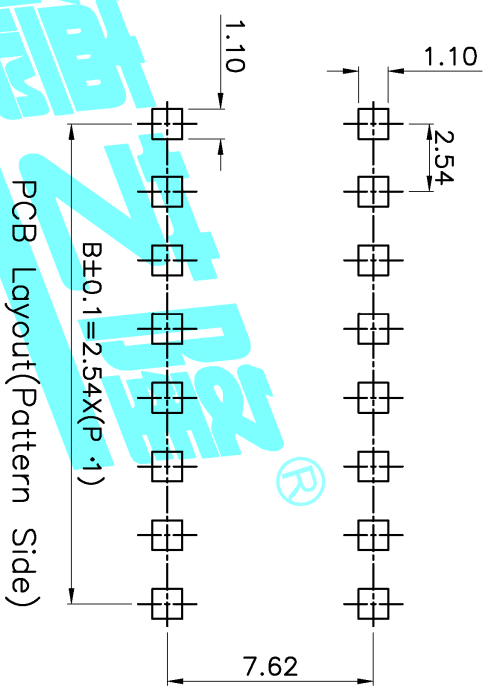


短柄 (S)



- NOTE:
1. Rating: 24V 25mA DC
 2. Contact Resistance: 50mΩ max
 3. Dielectric Strength: 500V AC/1Minute
 4. Operating Force: 1000gf Max
 5. Operating Life: 2,000 Cycles

Position(位数)	2P	3P	4P	5P	6P	7P	8P	9P	10P	12P	
DIM.A(长度)	6.54	9.08	11.62	14.16	16.70	19.24	21.78	24.32	26.86	31.94	
DIM.B(长度)	2.54	5.08	7.62	10.16	12.70	15.24	17.78	20.32	22.86	27.94	
PART NO.	凸柄 (P)	SC-02KP	SC-03KP	SC-04KP	SC-05KP	SC-06KP	SC-07KP	SC-08KP	SC-09KP	SC-10KP	SC-12KP
	短柄 (S)	SC-02KSI	SC-03KSI	SC-04KSI	SC-05KSI	SC-06KSI	SC-07KSI	SC-08KSI	SC-09KSI	SC-10KSI	SC-12KSI

ECN NO.	REV.	DATE.	DESCRIPTION.	CHANGE.	CHECK.	APPRO.
	A		NEW			

APPROVALS		DATE	ELECTRONICS CO.,LTD	
DRAWN	G.M.Chen	2015/6/26	DIP SWITCHES	
CHECKED			SC-XXXX	
APPROVALS			PART NO.	
TOLERANCES ARE	30~以上 ±0.30	ANGLE	UNIT: mm	SCALE: 1:1
	10~30 ±0.20			SHEET 1 OF 1
	5~10 ±0.15	±2'	DRAWING NO.	PROJ.
	~5 ±0.10			